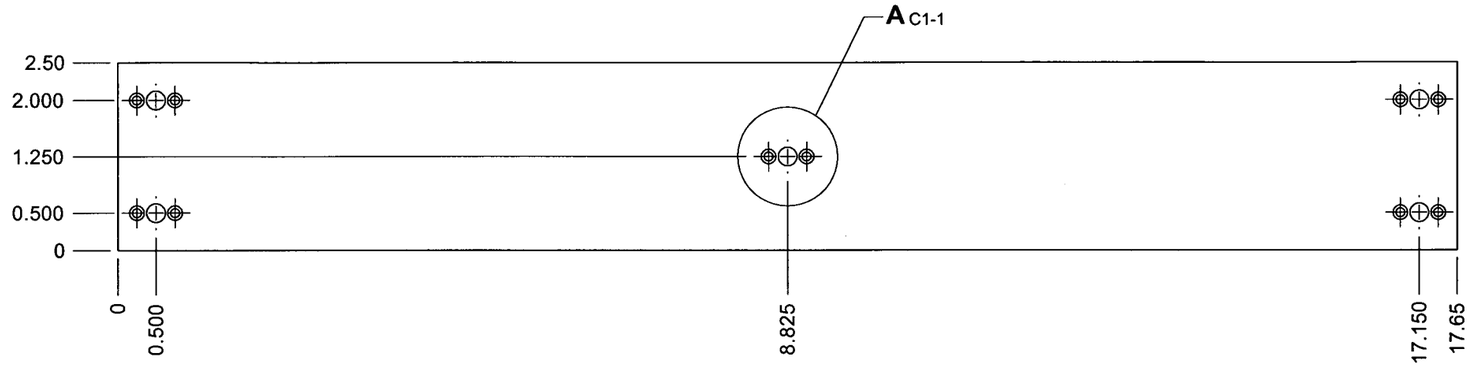

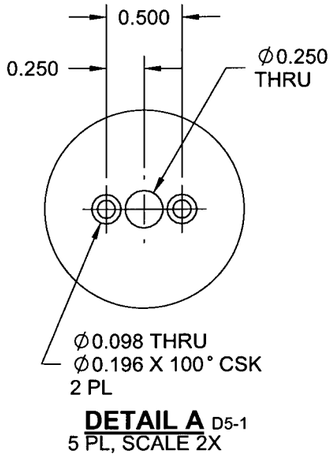

DETAIL A D5-1
5 PL, SCALE 2X

B67-43001-325 UPPER PAD FIXTURE

RELEASED
2010 -09- 16

NOTES:
1) MATERIAL: 2024-T3 ALUMINUM SHEET, 0.032 THICK
PER AMS-QQ-A-250/4 OR AMS 4037 OR ASTM B209
REF. DART SPEC. M2024T3S.032
2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
POWDER COAT GREEN SANDTEX (4.3.5.8) PER DART QSI 005 4.3
3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
4) UNITS: INCHES UNLESS OTHERWISE NOTED
5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
6) IDENTIFICATION: N/A
7) WEIGHT: 0.14 lbs

REV.	DESCRIPTION	BY	DATE
C	REDRAWN PREMIER AVIATION DRAWING IAW DART QSI 018 AND QSI 043. FOR PREVIOUS REVISONS, REFER TO SHEET 41 OF PREMIER AVIATION DRAWING No. B67-43001. REASON: SEE PAR#09-011.	MB	10.04.27

DESIGN	RW	**DART AEROSPACE LTD** HAWKESBURY, ONTARIO, CANADA	
DRAWN			
CHECKED		DRAWING NO. B67-43001-325	REV. C
MFG. APPR.			SHEET 1 OF 1
APPROVED		TITLE UPPER PAD FIXTURE	SCALE NTS
DE APPR.	N/A		
DATE	10.04.27		

COPYRIGHT © 1995 BY DART AEROSPACE LTD
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.